佩达 PEIDA Super
CEILING&PARTITION

Address : Unit 617, 6/F.,Fuying International Building,No.166 Changgang Road Central,Guangzhou,China
Postal Code : 510250
Tel : 86-20-6236 1215
Fax : 86-20-6236 1237
Mobile : 86-1358 0480 068
Website : www.gzpanda.cn
E-mail : sales@gzpanda.cn pandadecoration@gmail.com

公司地址：中国广东省广州市海珠区昌岗中路166号之三富盈国际大厦六楼617室
邮政编码：510250
电话：86-20-6236 1215
传真：86-20-6236 1237
手机：86-1358 0480 068
网址：www.gzpanda.cn
邮箱：sales@gzpanda.cn pandadecoration@gmail.com

PANDA

佩达 PEIDA Super
CEILING&PARTITION

广州佩达商贸发展有限公司
GUANGZHOU PANDA COMMERCIAL DEVELOPMENT CO.,LTD.

广州佩达商贸发展有限公司
GUANGZHOU PANDA COMMERCIAL DEVELOPMENT CO.,LTD.

About Us



Guangzhou Panda Commercial Development Co., Ltd. is a professional enterprise producing Gypsum Board, PVC Gypsum Board and installation accessories.

Our company has been established in 2007, after many years, it has been developed a classic industrial image and excellent reputation in mineral fiber ceiling industry. The Guangzhou Panda Commercial Development Co., Ltd. Occupies an area of 5066m^2 with modern automation production workshops and office building.

Many gifted engineering designers are employed in order to provide the integration if designing, producing, installing services for our customers. The ISO9001 Quality Management System leads us to control the quality of all products, researching and developing the environmental friendly decorating materials.

"To perfect the technology to provide fast, accurate and satisfactory service" is our goal.

Company culture:
1)Quality Concept: Honest, Perfect
2)Management Philosophy: Excellent Employees, Model Enterprises
3)Service concept: unremitting pursuit of perfection
4)Marketing Concept: Quality creates brand, manages open market.
5)Competition Concept: A market without competitors is a market without a future. Respecting your opponent is protecting yourself
6)Corporate mission: promote healthy living and build green homes.
7)Corporate purpose: Environmental protection

Certificate:



www.pandamanufacturer.com



Catalog

Gypsum Board

Specification..... 1

Features..... 1

Technical Parameters..... 1

Perforated Gypsum Board..... 2

Installation..... 3

Installation Accessories..... 4

PVC Gypsum Ceiling

Specification..... 5

Features..... 5

Technical Parameters..... 5~6

Ceiling Accessories..... 7

Factory Overview..... 8

www.pandamanufacturer.com

Gypsum Board

Specification

Item	Regular	Fire -proof	Moisture -Proof	Water-Proof
Width(mm)	900/1200/1220			
Length(mm)	2400/2440/3000			
Thickness (mm)	6.4/8/9/9.5/10/12/12.5/13/15/15.9			
Different dimension can be made as required				

Regular Gypsum Board



Fire-Proof Gypsum Board



Water-Proof Gypsum Board



Features

- High Quality Gypsum Material
- Tenacious Paper Face Protecting
- Convenience In Installation
- Widely Used In Partition And Suspension

Technical Parameters

Item	Standard Value		Test Value				
Density (kg/m^2)	-		Thickness	Regular	Fire Resistant	Water Resistant	
	≥9.5kg/m2		9.5mm	7.5	7.5	9.2	
	≥12kg/m2		12mm	9.5	9.5	11.5	
Flexural Strength(N)	Parallel	≤360	9.5mm	560			
		≤500	12mm	700			
	Cross	≤140	9.5mm	180			
		≤180	12mm	240			
Surface Paper Sticking the Core Material	Unexposed			Unexposed			
Stability (min)	Fire Resistant		≤20	/	/	>20	/
Water Absorption (%)	Water Resistant		≥10	9.5mm	/	/	6.8
				12mm	/	/	4.2
Radioactivity	Internal		IRa≤1.0	<0.1			
	External		Ir≤1.3	<0.1			
Note	Executive Standard:GB/T 9775-2008						

www.pandamanufacturer.com

PEIDA Super
CEILING WALL&FLOOR
Beauty Your Building, Beauty Your Life.

Gypsum Board

Perforated Gypsum Board

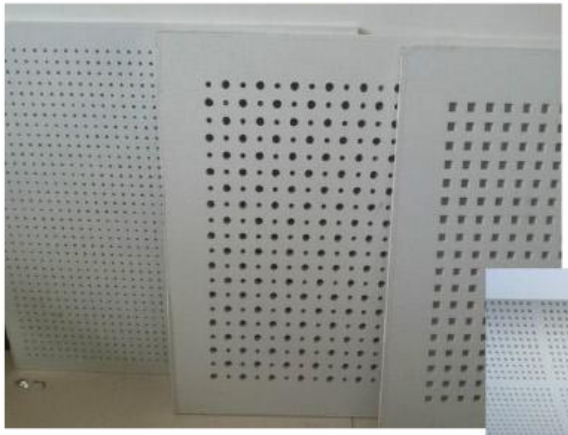



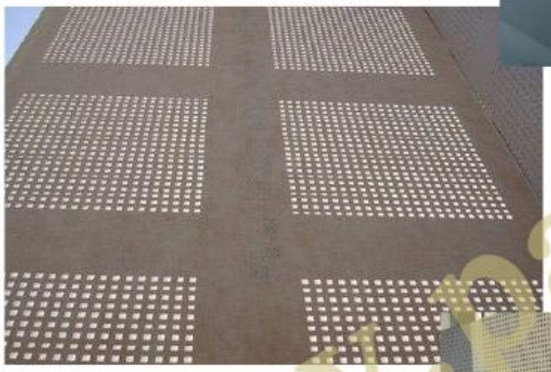

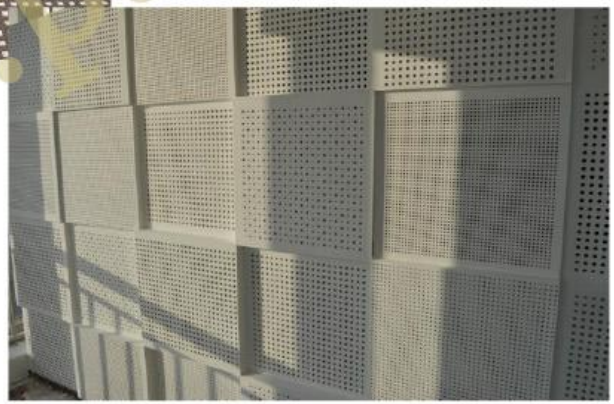

























www.pandamanufacturer.com

Gypsum Board

Installation

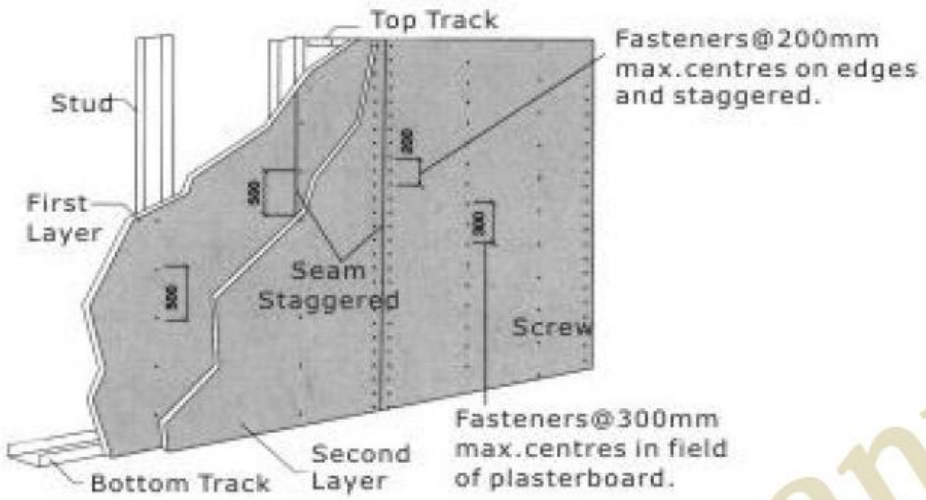

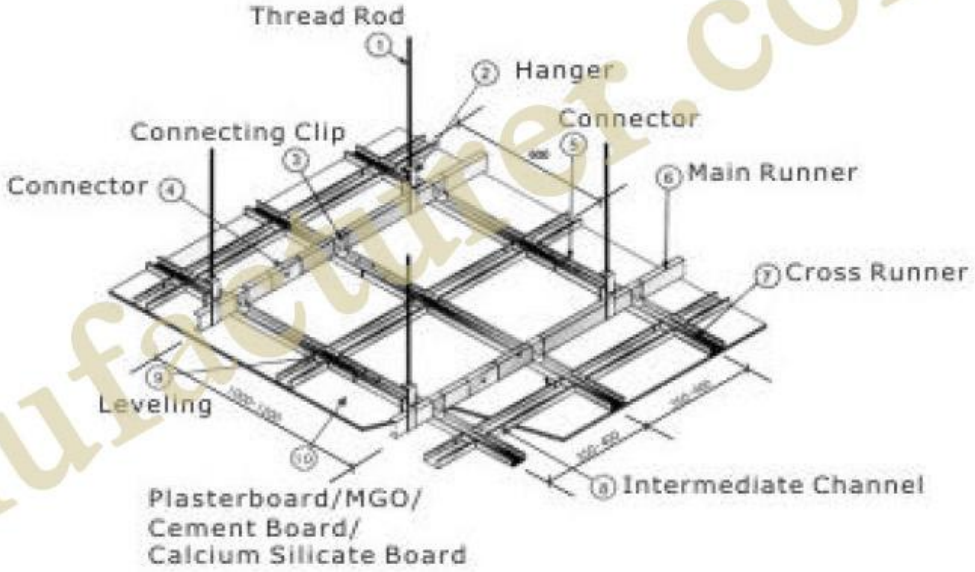

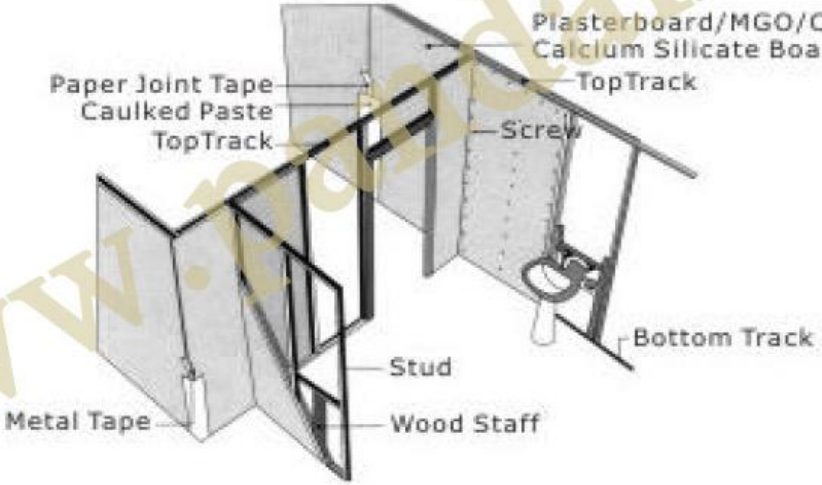

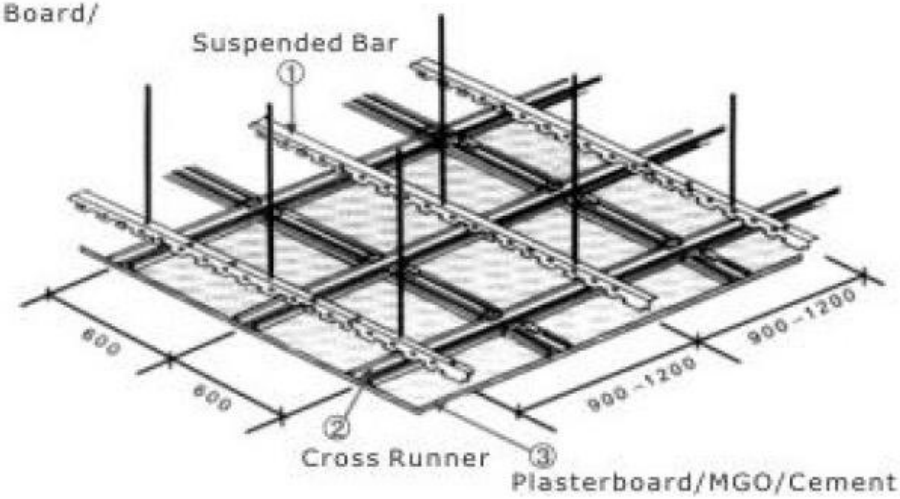

www.pandamanufacturer.com

Gypsum Board

Installation Accessories

Picture	Overview	Item	Item No.	Width A	Height B	Length	Thickness
		Stud	QC5040	50	40	3000	0.4/0.45/0.5/0.6
			QC6535	65	35	3000	0.4/0.45/0.5/0.6
			QC7035	70	35	3000	0.4/0.5/0.6
			QC7040	70	40	3000	0.4/0.5/0.6
			QC7535	75	35	3000	0.4/0.45/0.6
			QC7545	75	45	3000	0.4/0.5/0.6
			QC10050	100	50	3000	0.6/0.7/0.8/1.0
		Track	QU5040	50	40	3000	0.4/0.5/0.6
			QU6530	65	30	3000	0.4/0.45/0.5/0.6
			QU7030	70	30	3000	0.4/0.45/0.5/0.6
			QU7035	70	35	3000	0.4/0.45/0.5/0.6
			QU7525	75	25	3000	0.4/0.45/0.6
			QU7535	75	35	3000	0.45/0.5/0.6
			QU10040	100	40	3000	0.4/0.5/0.6/0.8
		Furring Channel	FC3522	A: 35 / C: 13	22	3000	0.4/0.5
		Main Runner	DU3812	38	12	3000	0.7/0.8/1.0/1.2
			DU5015	50	15	3000	0.8/1.0/1.2
			DU6027	60	27	3000	0.8/1.0/1.2
		Cross Runner	DC5015	50	15	3000	0.8/1.0/1.2
			DC5019	50	19	3000	0.4/0.45/0.5
			DC6027	60	27	3000	0.4/0.5/0.6
		Suspended Bar	SB2025	20	25	3000	0.6/0.7/0.8/ 0.9/1.0
			SB2028	20	28	3000	
			SB2032	20	32	3000	
		Wall Angle	WA-1	25	25	3000	0.4/0.45/0.5
		Corner Bead	WA-2	25	25	3000	0.4/0.45/0.5

Overview	Item	Item No.	Overview	Item	Item No.	Overview	Item	Item No.
	Supporter	SP-75		Connector of Main Runner	CM-38		Hanger	HD-38
		SP-100			CM-50			HD-50
					CM-60			HD-60
	Leveling	LS-50		Connector of Cross Runner	CB-50		Short Connecting Clip	SCC-38
		LS-60			CB-60			SCC-50
								SCC-60
	Thread Rod	HB-06		Sleeve Anchor	SA-06		Drop in Anchor	DIA-06
		HB-08			SA-08			DIA-08
	Paper Joint Tape	47mm×50m		Mesh Joint Tape	50mm×90m		Metal Tape	50mm×30m
	Ready Mixed Joint Compound	25kgs/bucket		Wall Putty	25kgs/bag		Joint Compound	25kgs/bag

Screw Product

Overview	Item	Head	Thread	Item No.	Diameter(mm)	Length(mm)
	Drywall Self Tapping Screw	Bugle	Fine/ Coarse	BSTS3513	3.5	13
				BSTS3525		25
				BSTS3535		35
				BSTS3545		45
				BSTS3555		55
				BSTS3938	3.9	38
				BSTS4270	4.2	70
		Flat	Fine/ Coarse	CSTS3525	3.5	25
				CSTS4225	4.2	25
		Pan Framing	Fine/ Coarse	PSTS3595	3.5	9.5
	Drywall Self Drilling Screw	Bugle	Fine/ Coarse	BSDS3516	3.5	16
				BSDS3525		25
				BSDS3535		35
				BSDS4270	4.2	70
		Flat	Fine/ Coarse	CSDS3525	3.5	25
				CSDS4216	4.2	16
				CSDS4225		25
		Pan Framing	Fine/ Coarse	PSDS3911	3.9	11
	Widely Used for Calcium Silicate Board or Fiber Cement Board	Conutersunk	/	BSTQ3513	3.5	13
				BSTQ3525		25
				BSTQ3530		30
		Conutersunk	/	CSDJ3525	3.5	25
				CSDJ3535		35
				CSDJ3540		40
				CSDJ3925	3.9	25
				CSDJ3935		35
		Head Diameter:8mm Shank Diameter:3.7mm Accessory:Flute and Angle Clip				

www.pandamanufacturer.com

PVC Gypsum Ceiling

Specification

Item	Length(mm)	Width (mm)	Thickness (mm)	Application
White/Color Design	600	600	7/7.5/8/9/ 12	Ceiling/ Wall Decoration
	1200	600		
Metric/Imperial Available				

Features

- Moisture Resistance
- Corrosion Resistance
- Light Weight
- Easy to clean

Technical Parameters

Item		Unit	Test Value
Unit Weight		Kg/m2	±6
Finish		/	Vinyl
Back Side		/	Paper or Aluminum Foil
Flexural Strength		N	179
Moisture Content		%	0.2
Moisture Deflection		mm	1.8
Thermal Conductivity		W/m·k	0.16
Light Reflectance		%	75
Tolerance In Dimension	Length	mm	≤±2.0
	Width		≤±2.0
	Thickness		≤±0.5



www.pandamanufacturer.com

PEIDA Super
CEILING WALL&FLOOR
Beauty Your Building, Beauty Your Life.

PVC Gypsum Ceiling















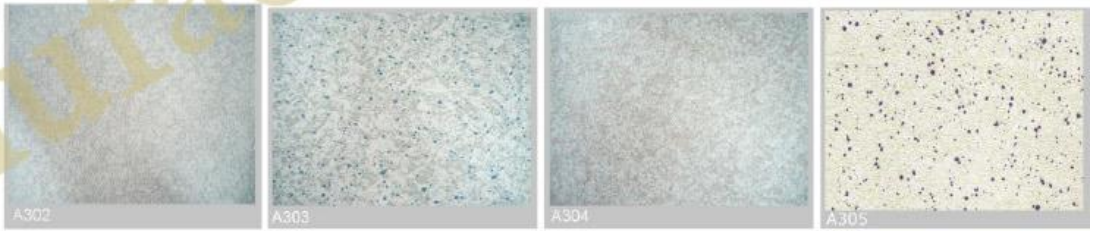

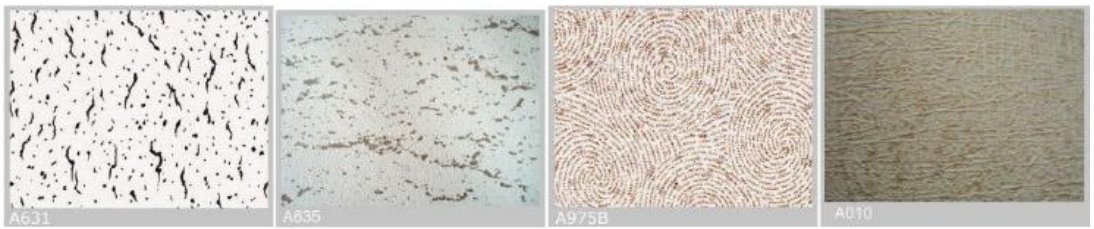



www.pandamanufacturer.com

PVC Gypsum Ceiling

Ceiling Accessories



Ceiling T-Grid



Main Runner



Connector



38 Main Carrier Bracket



Thread Rod



Nut



Sleeve Anchor



Screw



Asjustable Hook Rod

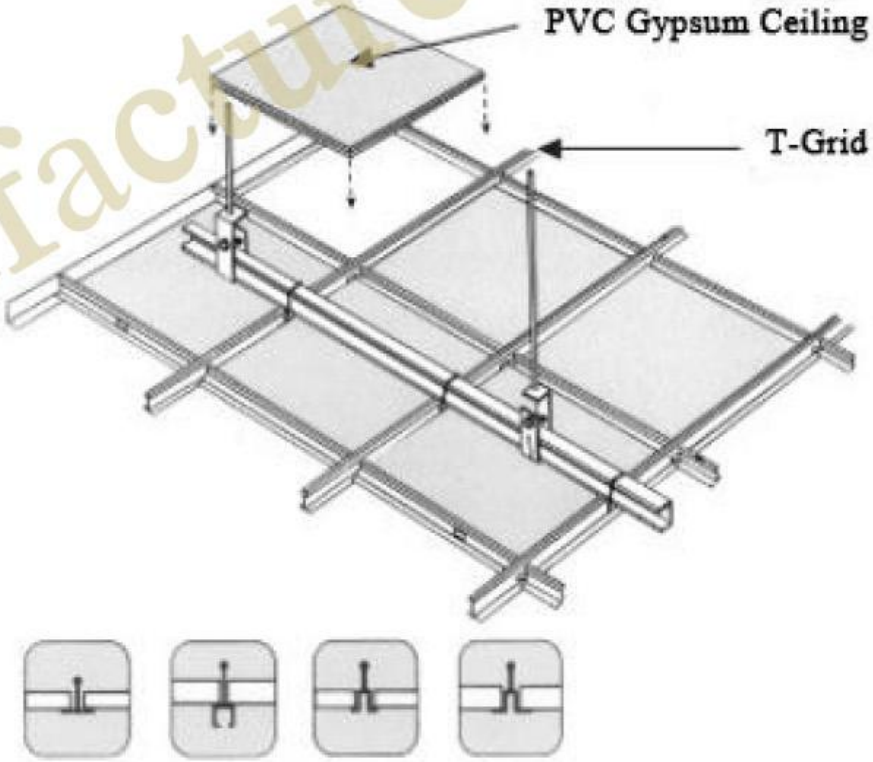

www.pandamanufacturer.com

Factory Overview







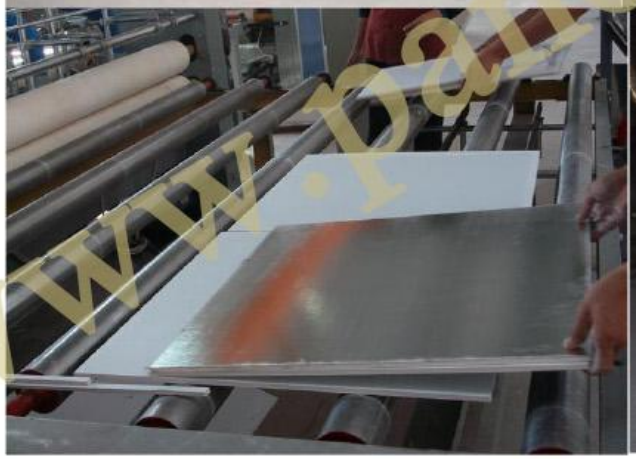



www.pandamanufacturer.com